




This mirror is designed to provide low wavelength dispersion suitable for use with ultra-short pulse lasers with 100 femtosecond or less.

- We have designed a special thin film coating that optimizes wavelength dispersion, range and the strength of lasers.
- It has the effect of suppressing the spread of the pulse width produced by a plurality of reflecting mirrors.
- There are three types available, FLM1 standard, FLM2 wide wavelength band, and FLMHP for high power femtosecond laser*.
- These mirrors are designed and produced for usage within the microscopy with femtosecond laser and optical systems with femtosecond time-resolved spectroscopy.

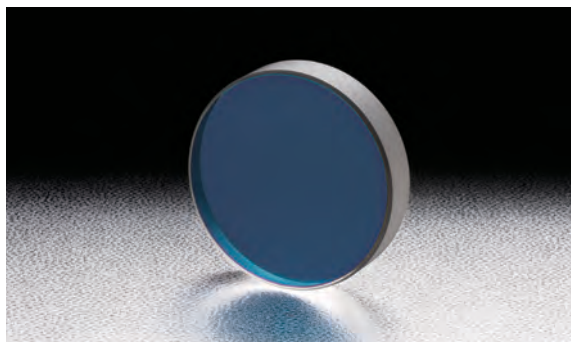

Specifications	
Material	BK7 (FLM) Synthetic fused silica (FLMHP)
Coating	Dielectric multi-layer coating
Incident angle	45°±3°
Surface Flatness	λ/10
Parallelism	<5"
Surface Quality (Scratch-Dig)	10-5
Clear aperture	80% of Actual Aperture
Rear Surface	Polished


Guide

- ▶ These low dispersion wavelength mirrors are available in physical dimensions other than those found in the catalog, please contact our Sales Division for Custom products.
- ▶ We can also provide high power negative dispersion mirror.
- ▶ Also available are our surface flatness guarantee (HTFM) mirrors with accuracy guarantee after surface coating. [Reference](#) B016

Attention


- ▶ When used in angles other than 45 degrees (AOI), we would not be able to guarantee the wavelength dispersion.

Schematic

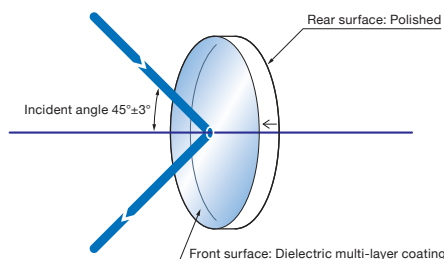

Outline Drawing

(in mm)



- Tolerance
Diameter $\phi D_{\pm 0.1}$
Thickness $t \pm 0.1$

Low Dispersion Mirrors for Femtosecond Laser						
Part Number	Wavelength Range		Diameter ϕD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
	S polarization [nm]	P polarization [nm]				
FLM1-12.7C05-800	720 – 900	760 – 840	$\phi 12.7$	5	>99.8	1
FLM1-25.4C05-800	720 – 900	760 – 840	$\phi 25.4$	5	>99.8	1
FLM1-30C05-800	720 – 900	760 – 840	$\phi 30$	5	>99.8	1
FLM2-12.7C05-800	700 – 940	740 – 860	$\phi 12.7$	5	>99.8	0.5
FLM2-25.4C05-800	700 – 940	740 – 860	$\phi 25.4$	5	>99.8	0.5
FLM2-30C05-800	700 – 940	740 – 860	$\phi 30$	5	>99.8	0.5

* Laser pulse width 50fs, wavelength 800nm

Low Dispersion Mirrors for High Power Femtosecond Laser						
Part Number	Wavelength Range		Diameter ϕD [mm]	Thickness t [mm]	Reflectance [%]	Laser Damage Threshold* [J/cm ²]
	S polarization [nm]	P polarization [nm]				
FLMHP-12.7C05-800	745 – 855	775 – 825	$\phi 12.7$	5	>99	2
FLMHP-25.4C05-800	745 – 855	775 – 825	$\phi 25.4$	5	>99	2
FLMHP-30C05-800	745 – 855	775 – 825	$\phi 30$	5	>99	2

* Laser pulse width 65fs, wavelength 800nm

Compatible Optic Mounts

MHG-MP12.7-NL / MHG-MP25-NL, HS25-NL / MHG-MP30-NL, HS30-NL

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband

Dielectric Coating

Aluminum Coating

Gold Coating

Low Dispersion Mirrors for Femtosecond Laser | FLM/FLMHP

Application Systems

Optics & Optical Coatings

Opto-Mechanics

Bases

Manual Stages

Actuators & Adjusters

MotORIZED Stages

Light Sources & Laser Safety

Index

Guide

Mirrors

Beamsplitters

Polarizers

Lenses

Multi-Element Optics

Filters

Prisms

Substrates/Windows

Optical Data

Maintenance

Selection Guide

Super Mirror

Femtosecond Laser

Frameless

Accuracy Guarantee

High Power

Ultra Broadband



Dielectric Coating

Aluminum Coating

Gold Coating



Typical Reflectance Data

R: Reflectance

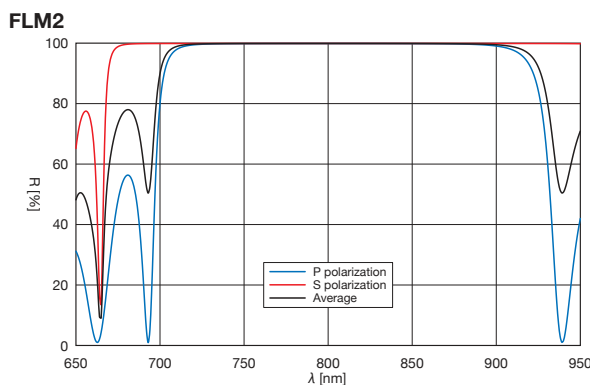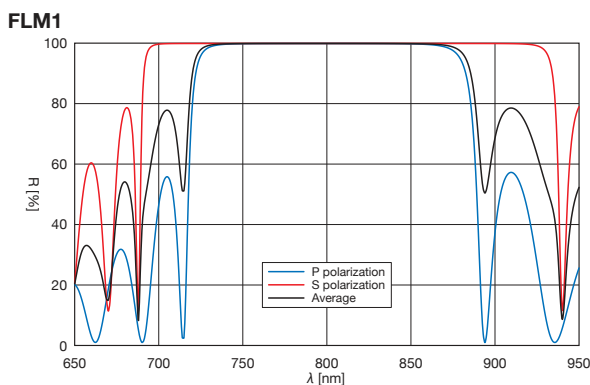

Group Delay Data (for reference only)

GDD: Group Delay Dispersion

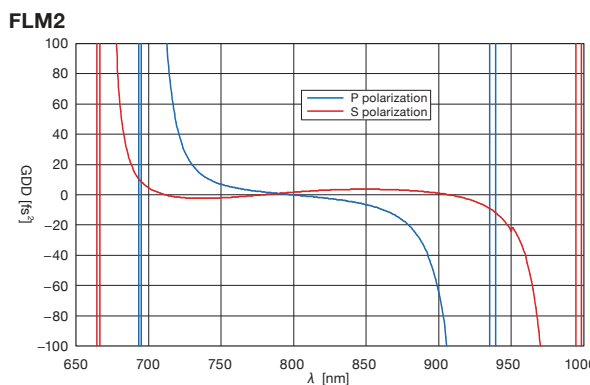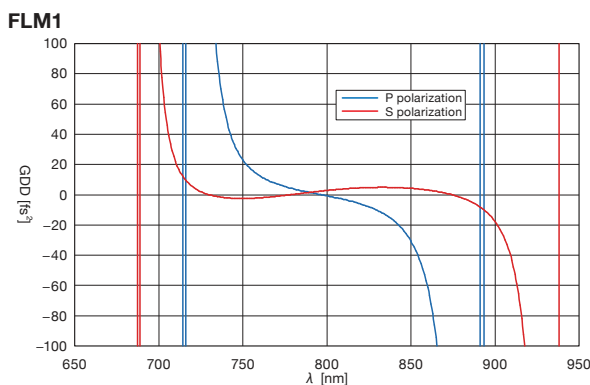

Typical Reflectance Data

R: Reflectance

